

Heracleum The Big O

BERTJAN POT | POWERED THROUGH ELECTROSANDWICH® BY MARCEL WANDERS



Heracleum's festive foliage crown turns into a more intimate embrace. Its joyful glow of merry branches is a glorious feast for the eyes. With its more modest diameter, its sparkling beauty may decorate all kind of interior environments, big and small.

Detailing



Heracleum is powered by Electrosandwich, a technique of coating conductive layers, very thin and delicate. A design not possible with normal wires.

Colours




Copper



Nickel

Heracleum The Big O / Big

Dimensions

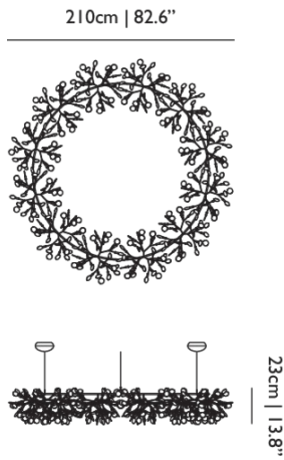

Product

WIDTH 210cm | 82.7"
HEIGHT 23cm | 9.1"
DEPTH 210cm | 82.7"
DIAMETER 210cm | 82.7"
WEIGHT NETTO 10.5kg | 23.15lbs

Packaging

WIDTH 115cm | 45.3"
HEIGHT 107cm | 42.1"
CUBAGE 2.93m³ | 103.64ft³
LENGTH 238.5cm | 93.9"
WEIGHT 30kg | 66.14lbs

Technical CE

MATERIAL

Metal wire frame, polycarbonate lenses, ultra thin suspension wire

ENERGY LABEL

Energy Label B

LIGHTSOURCE TYPE

LED

NUMBER OF LIGHTSOURCES

324

INPUT VOLTAGE

200-265

MAX POWER CONSUMPTION

70W

LAMPHOLDER

LED (Solid state)

CABLE COLOUR

Transparent with tinned cores

CANOPY

Pebble II Copper Coated, ABS

CRI

80

LIGHT OUTPUT

2600 lm

INSTALLATION REQUIRED

Yes

LIGHTSOURCE INCLUDED

Yes

SHAPE

Round

FREQUENCY

50/60

DIMMABLE

Yes

LIFETIME

50000 hours

CABLE LENGTH

400cm | 157.5"; 1000cm | 393.7"

COLOUR TEMPERATURE

2700 K

LIGHT DIRECTION

All directions

Technical cULus

MATERIAL

Metal wire frame, polycarbonate lenses, ultra thin suspension wire

ENERGY LABEL

Energy Label B

INSTALLATION REQUIRED

Yes

LIGHTSOURCE TYPE

LED

LIGHTSOURCE INCLUDED

Yes

NUMBER OF LIGHTSOURCES

324

SHAPE

Round

INPUT VOLTAGE

110-127

FREQUENCY

50/60

MAX POWER CONSUMPTION

70W

DIMMABLE

Yes

LAMPHOLDER

LED (Solid state)

LIFETIME

50000 hours

CABLE COLOUR

Transparent with tinned cores

CABLE LENGTH

400cm | 157.5"; 1000cm | 393.7"

CANOPY

Pebble II Copper Coated, ABS

COLOUR TEMPERATURE

2700 K

CRI

80

LIGHT DIRECTION


All directions

LIGHT OUTPUT

2600 lm

Heracleum The Big O / Small

Dimensions

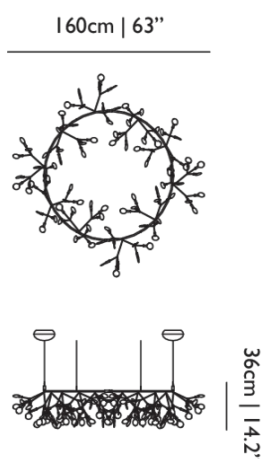

Product

WIDTH 160cm | 63"
HEIGHT 36cm | 14.2"
DEPTH 160cm | 63"
DIAMETER 160cm | 63"
WEIGHT NETTO 7.7kg | 16.98lbs

Packaging

WIDTH 48cm | 18.9"
HEIGHT 157cm | 61.8"
CUBAGE 1.15m³ | 40.72ft³
LENGTH 153cm | 60.2"
WEIGHT 18kg | 39.68lbs

Technical CE

MATERIAL

Metal wire frame, polycarbonate lenses, ultra thin suspension wire

ENERGY LABEL

Energy Label B

INSTALLATION REQUIRED

Yes

LIGHTSOURCE TYPE

LED

LIGHTSOURCE INCLUDED

Yes

NUMBER OF LIGHTSOURCES

90

SHAPE

Round

INPUT VOLTAGE

200-265

FREQUENCY

50/60

MAX POWER CONSUMPTION

25W

DIMMABLE

Yes

LAMPHOLDER

LED (Solid state)

LIFETIME

50000 hours

CABLE COLOUR

Transparent with tinned cores

CABLE LENGTH

400cm | 157.5"; 1000cm | 393.7"

CANOPY

Pebble II Copper Coated, ABS

COLOUR TEMPERATURE

2700 K

CRI

80

LIGHT DIRECTION

All directions

LIGHT OUTPUT

1400 lm

Technical cULus

MATERIAL

Metal wire frame, polycarbonate lenses, ultra thin suspension wire

ENERGY LABEL

Energy Label B

INSTALLATION REQUIRED

Yes

LIGHTSOURCE TYPE

LED

LIGHTSOURCE INCLUDED

Yes

NUMBER OF LIGHTSOURCES

90

SHAPE

Round

INPUT VOLTAGE

110-127

FREQUENCY

50/60

MAX POWER CONSUMPTION

25W

DIMMABLE

Yes

LAMPHOLDER

LED (Solid state)

CABLE COLOUR

Transparent with tinned cores

CANOPY

Pebble II Copper Coated, ABS

CRI

80

LIGHT OUTPUT

1400 lm

LIFETIME

50000 hours

CABLE LENGTH

400cm | 157.5"; 1000cm | 393.7"

COLOUR TEMPERATURE

2700 K

LIGHT DIRECTION

All directions

Dimmer

For fluent dimming behaviour we advise a dimmer that is compatible with the following specs.

Please note the functioning of the dimmer and the power supply combination can never be predicted, it always needs to be tested in practice.

DIMMER TYPE

Mains and/or 1-10V dimmable (trailing edge / reverse phase)

LOAD TYPE

Capacitive load (C-Type)
