

m o o o i

The Party

KRANEN/GILLE




'The Party' is inspired by a clan of strong, captivating personalities. Their casted ceramic faces bring to light our fascination with secrets, family dynamics and intrigue. If seen together, as a splendid party, they brighten up the stage with their cool playfulness. Yet behind the lamps' composed façades a mischievous side seeps through and touches our imagination. The characters that join The Party each have an intriguing story that connects them: the want-to-be aristocrat, the black sheep, the opportunist, the patriot and the evil mastermind. Fragments of their personalities appeal to our own hidden side, stimulating recognition, interest and curiosity. The lamps share the same basic tactile feel, a subtle roughness given by the granular ceramic finish, but are distinguished by their individual style and detailing.

Detailing



This lamp brings The Mayor, Bert, Glenn, Ted & Coco, The Party together for a family reunion.


Colours



Grey

The Party

Dimensions

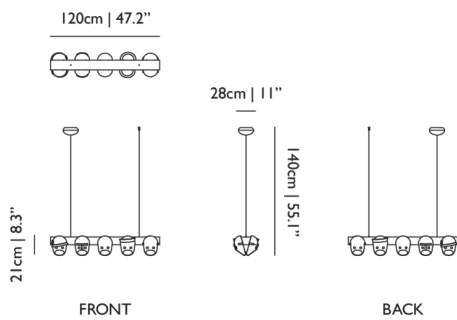

Product

WIDTH 120cm | 47.2"

HEIGHT 21cm | 8.3"

DEPTH 28cm | 11"

WEIGHT NETTO 15kg | 33.07lbs

Packaging

WIDTH 50cm | 19.7"

HEIGHT 50cm | 19.7"

CUBAGE 0.31m³ | 11.04ft³

LENGTH 125cm | 49.2"

WEIGHT 15kg | 33.07lbs

Technical UL

MATERIAL

Ceramic, enogobio finish, aluminium, brass knob

ENERGY LABEL

D

LIGHTSOURCE TYPE

LED

NUMBER OF LIGHTSOURCES

10

INPUT VOLTAGE

110-120V

MAX POWER CONSUMPTION

52W

LIFETIME

50000 hours

CABLE LENGTH

400cm | 157.5"; 1000cm | 393.7"

INSTALLATION REQUIRED

Yes

LIGHTSOURCE INCLUDED

Yes

SHAPE

Linear

FREQUENCY

50/60

LAMPHOLDER

LED (Solid state)

CABLE COLOUR

Transparent with tinned cores

CANOPY

Pebble II Steel Coated, ABS

COLOUR TEMPERATURE

2700 K

CRI

85

LIGHT DIRECTION

All directions

LIGHT OUTPUT

770 lm

DIMMING & LIGHTING CONTROL

Mains, Trailing edge, Reverse phase

See last page for more information about the dimming possibilities.



Dimming & Lighting Control

Mains, Trailing edge, Reverse phase

The luminaire is dimmable by using an external Electronic Low Voltage dimmer. The dimmer is usually mounted on an existing wall socket and there is no need to change your home's wiring. On the dimmer it should show that it is a LED dimmer, suitable for 5 Watts or lower and C-type capable. Dimming is less fluent and can come with some flicker, a beep or a buzz.

Compatible models: The Party CE, The Party UL
