

m o o o i

## Perch Light Floor

UMUT YAMAC



Look up, into the soft light, follow the fluttering sound and sparks of movement. A bird is gracefully balanced on a tall metal perch, beautiful and proud, a swinging glimmer of warm light... yet you are inside, after daylight has faded, under the spell of the Perch Light Floor Lamp!

---

### *Detailing*



This sunlit bird is free to swing when softly touched. It gently glows and brings along the promise of spring.

---


### *Colours*



Brass and white

# Perch Light Floor

## Dimensions

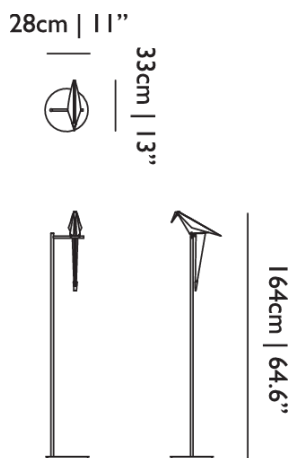

## Product

**WIDTH** 28cm | 11"  
**HEIGHT** 164cm | 64.6"  
**DEPTH** 33cm | 13"  
**WEIGHT NETTO** 9kg | 19.84lbs

## Packaging

**WIDTH** 34cm | 13.4"  
**HEIGHT** 33cm | 13"  
**CUBAGE** 0.18m<sup>3</sup> | 6.34ft<sup>3</sup>  
**LENGTH** 160cm | 63"  
**WEIGHT** 8.5kg | 18.74lbs

## Technical CE

### MATERIAL

Steel and aluminium frame with polycarbonate (PC) and synthetic paper birds.

### ENERGY LABEL

B

### LIGHTSOURCE TYPE

LED

### LIGHTSOURCE INCLUDED

Yes

### NUMBER OF LIGHTSOURCES

1

### INPUT VOLTAGE

90-264V

### FREQUENCY

50/60

### MAX POWER CONSUMPTION

5W

### LAMPHOLDER

LED (Solid state)

### LIFETIME

50000 hours

### CABLE COLOUR

Black

### PLUG TYPE

Europlug (Type-C)

### CABLE LENGTH

450cm | 177.2"

### SWITCH

In line on/off switch

### COLOUR TEMPERATURE

3000 K

### CRI

80

### LIGHT DIRECTION

All directions

### LIGHT OUTPUT

150 lm



## Technical UL

**MATERIAL**

Steel and aluminium frame with polycarbonate (PC) and synthetic paper birds.

**ENERGY LABEL**

B

**LIGHTSOURCE TYPE**

LED

**LIGHTSOURCE INCLUDED**

Yes

**NUMBER OF LIGHTSOURCES**

1

**INPUT VOLTAGE**

100-240V

**FREQUENCY**

50/60

**MAX POWER CONSUMPTION**

5W

**LAMPHOLDER**

LED (Solid state)

**LIFETIME**

50000 hours

**CABLE COLOUR**

Black

**PLUG TYPE**

US plug (Type A)

**CABLE LENGTH**

450cm | 177.2"

**SWITCH**

In line on/off switch

**COLOUR TEMPERATURE**

3000 K

**CRI**

80

**LIGHT DIRECTION**

All directions

**LIGHT OUTPUT**

150 lm

