

m o o o i

## Prop Light Suspended

BERTJAN POT



"We have round lights, we have straight lights. We have them with lights on one side, we have them with lights on two sides. You can hang them high, low, horizontally, vertically or even hang them in an angle. Put them on the floor, hang them on your wall or down from the ceiling. We find it very hard to imagine an interior where this prop is not in place" - Bertjan Pot

---

### *Detailing*



A theatrical, extravagant look that is suitable for spaces with both low and high ceilings.

---

### *Colours*

2000K

Warm White


2700K

Soft White


# Prop Light Suspended / Double

## Dimensions

98cm | 38.6"



18cm | 7.1"



17cm | 6.7"

## Product

**WIDTH** 98cm | 38.6"

**HEIGHT** 18cm | 7.1"

**DEPTH** 18cm | 7.1"

**WEIGHT NETTO** 6kg | 13.23lbs

## Packaging

**WIDTH** 30cm | 11.8"

**HEIGHT** 30cm | 11.8"

**CUBAGE** 0.12m<sup>3</sup> | 4.23ft<sup>3</sup>

**LENGTH** 133cm | 52.4"

**WEIGHT** 10kg | 22.05lbs

## Technical CE

### ADDITIONAL

The Proplight is available in two colour temperatures: 2000K or 2700K.

### MATERIAL

HIPS housing, PMMA light guide, glass bulbs.

### ENERGY LABEL

A

### LIGHTSOURCE TYPE

LED

### NUMBER OF LIGHTSOURCES

36

### INPUT VOLTAGE

110-240V

### MAX POWER CONSUMPTION

21W

### LIFETIME

50000 hours

### CABLE LENGTH

400cm | 157.5"

### CRI

80

### LIGHT OUTPUT

1600 lm

### INSTALLATION REQUIRED

Yes

### LIGHTSOURCE INCLUDED

Yes

### SHAPE

Linear

### FREQUENCY

50/60

### LAMPHOLDER

LED (Solid state)

### CABLE COLOUR

Transparent with tinned cores

### CANOPY

Pebble II White, ABS

### LIGHT DIRECTION

All directions

### DIMMING & LIGHTING CONTROL

Mains, Trailing edge, Reverse phase

*See last page for more information about the dimming possibilities.*



---

## Technical UL

### ADDITIONAL

The Proplight is available in two colour temperatures: 2000K or 2700K.

### MATERIAL

HIPS housing, PMMA light guide, glass bulbs.

### ENERGY LABEL

A

### LIGHTSOURCE TYPE

LED

### NUMBER OF LIGHTSOURCES

36

### INPUT VOLTAGE

110-240V

### MAX POWER CONSUMPTION

21W

### LIFETIME

50000 hours

### CABLE LENGTH

400cm | 157.5"

### CRI

80

### LIGHT OUTPUT

1600 lm

### INSTALLATION REQUIRED

Yes

### LIGHTSOURCE INCLUDED

Yes

### SHAPE

Linear

### FREQUENCY

50/60

### LAMPHOLDER

LED (Solid state)

### CABLE COLOUR

Transparent with tinned cores

### CANOPY

Pebble II White, ABS

### LIGHT DIRECTION

All directions

### DIMMING & LIGHTING CONTROL

Mains, Trailing edge, Reverse phase


*See last page for more information about the dimming possibilities.*




# Prop Light Suspended / Double Horizontal

## Dimensions

98cm | 38.6"



17cm | 6.7"



18cm | 7.1"

## Product

**WIDTH** 98cm | 38.6"

**HEIGHT** 18cm | 7.1"

**DEPTH** 17cm | 6.7"

**WEIGHT NETTO** 6kg | 13.23lbs

## Packaging

**WIDTH** 30cm | 11.8"

**HEIGHT** 30cm | 11.8"

**CUBAGE** 0.12m<sup>3</sup> | 4.23ft<sup>3</sup>

**LENGTH** 133cm | 52.4"

**WEIGHT** 10kg | 22.05lbs

## Technical CE

### ADDITIONAL

The Proplight is available in two colour temperatures: 2000K or 2700K.

### MATERIAL

HIPS housing, PMMA light guide, glass bulbs.

### ENERGY LABEL

A

### INSTALLATION REQUIRED

Yes

### LIGHTSOURCE TYPE

LED

### LIGHTSOURCE INCLUDED

Yes

### NUMBER OF LIGHTSOURCES

36

### SHAPE

Linear

### INPUT VOLTAGE

110-240V

### FREQUENCY

50/60

### MAX POWER CONSUMPTION

21W

### LAMPHOLDER

LED (Solid state)

### LIFETIME

50000 hours

### CABLE COLOUR

Transparent with tinned cores

### CABLE LENGTH

400cm | 157.5"

### CANOPY

Pebble II White, ABS

### CRI

80

### LIGHT DIRECTION

All directions

### LIGHT OUTPUT

1600 lm

### DIMMING & LIGHTING CONTROL

Mains, Trailing edge, Reverse phase

*See last page for more information about the dimming possibilities.*



---

## Technical UL

### ADDITIONAL

The Proplight is available in two colour temperatures: 2000K or 2700K.

### MATERIAL

HIPS housing, PMMA light guide, glass bulbs.

### ENERGY LABEL

A

### INSTALLATION REQUIRED

Yes

### LIGHTSOURCE TYPE

LED

### LIGHTSOURCE INCLUDED

Yes

### NUMBER OF LIGHTSOURCES

36

### SHAPE

Linear

### INPUT VOLTAGE

110-240V

### FREQUENCY

50/60

### MAX POWER CONSUMPTION

21W

### LAMPHOLDER

LED (Solid state)

### LIFETIME

50000 hours

### CABLE COLOUR

Transparent with tinned cores

### CABLE LENGTH

400cm | 157.5"

### CANOPY

Pebble II White, ABS

### CRI

80

### LIGHT DIRECTION

All directions

### LIGHT OUTPUT

1600 lm

### DIMMING & LIGHTING CONTROL


Mains, Trailing edge, Reverse phase

*See last page for more information about the dimming possibilities.*



# Prop Light Suspended / Double Vertical

## Dimensions

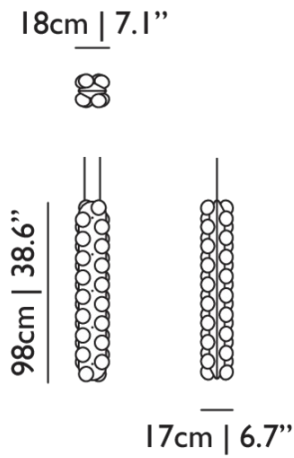

## Product

**WIDTH** 17cm | 6.7"  
**HEIGHT** 98cm | 38.6"  
**DEPTH** 18cm | 7.1"  
**WEIGHT NETTO** 6kg | 13.23lbs

## Packaging

**WIDTH** 30cm | 11.8"  
**HEIGHT** 30cm | 11.8"  
**CUBAGE** 0.12m<sup>3</sup> | 4.23ft<sup>3</sup>  
**LENGTH** 133cm | 52.4"  
**WEIGHT** 10kg | 22.05lbs

## Technical CE

### ADDITIONAL

The Proplight is available in two colour temperatures: 2000K or 2700K.

### MATERIAL

HIPS housing, PMMA light guide, glass bulbs.

### ENERGY LABEL

A

### INSTALLATION REQUIRED

Yes

### LIGHTSOURCE TYPE

LED

### LIGHTSOURCE INCLUDED

Yes

### NUMBER OF LIGHTSOURCES

36

### SHAPE

Linear

### INPUT VOLTAGE

110-240V

### FREQUENCY

50/60

### MAX POWER CONSUMPTION

21W

### LAMPHOLDER

LED (Solid state)

### LIFETIME

50000 hours

### CABLE COLOUR

Transparent with tinned cores

### CABLE LENGTH

400cm | 157.5"; 1000cm | 393.7"

### CANOPY

Pebble II White, ABS

### CRI

80

### LIGHT DIRECTION

All directions

### LIGHT OUTPUT

1600 lm

### DIMMING & LIGHTING CONTROL

Mains, Trailing edge, Reverse phase

*See last page for more information about the dimming possibilities.*



---

## Technical UL

### ADDITIONAL

The Proplight is available in two colour temperatures: 2000K or 2700K.

### MATERIAL

HIPS housing, PMMA light guide, glass bulbs.

### ENERGY LABEL

A

### LIGHTSOURCE TYPE

LED

### NUMBER OF LIGHTSOURCES

36

### INPUT VOLTAGE

110-240V

### MAX POWER CONSUMPTION

21W

### LIFETIME

50000 hours

### CABLE LENGTH

400cm | 157.5"

### CRI

80

### LIGHT OUTPUT

1600 lm

### INSTALLATION REQUIRED

Yes

### LIGHTSOURCE INCLUDED

Yes

### SHAPE

Linear

### FREQUENCY

50/60

### LAMPHOLDER

LED (Solid state)

### CABLE COLOUR

Transparent with tinned cores

### CANOPY

Pebble II White, ABS

### LIGHT DIRECTION

All directions

### DIMMING & LIGHTING CONTROL

Mains, Trailing edge, Reverse phase



*See last page for more information about the dimming possibilities.*



# Prop Light Suspended / Round Double

## Dimensions

73cm | 28.7"



## Product

**WIDTH** 73cm | 28.7"

**HEIGHT** 25cm | 9.8"

**DEPTH** 73cm | 28.7"

**DIAMETER** 73cm | 28.7"

**WEIGHT NETTO** 9kg | 19.84lbs

## Packaging

**WIDTH** 88cm | 34.6"

**HEIGHT** 34cm | 13.4"

**CUBAGE** 0.27m<sup>3</sup> | 9.4ft<sup>3</sup>

**LENGTH** 89cm | 35"

**WEIGHT** 15kg | 33.07lbs

## Technical CE

### ADDITIONAL

The Proplight is available in two colour temperatures: 2000K or 2700K.

### MATERIAL

HIPS housing, PMMA light guide, glass bulbs.

### ENERGY LABEL

B

### LIGHTSOURCE TYPE

LED

### NUMBER OF LIGHTSOURCES

96

### INPUT VOLTAGE

110-240V

### MAX POWER CONSUMPTION

41W

### LIFETIME

50000 hours

### CABLE LENGTH

400cm | 157.5"

### CRI

80

### LIGHT OUTPUT

1936 lm

### INSTALLATION REQUIRED

Yes

### LIGHTSOURCE INCLUDED

Yes

### SHAPE

Disc

### FREQUENCY

50/60

### LAMPHOLDER

LED (Solid state)

### CABLE COLOUR

Transparent with tinned cores

### CANOPY

Pebble II White, ABS

### LIGHT DIRECTION

All directions

### DIMMING & LIGHTING CONTROL

Mains, Trailing edge, Reverse phase

*See last page for more information about the dimming possibilities.*





---

## Technical UL

### ADDITIONAL

The Proplight is available in two colour temperatures: 2000K or 2700K.

### MATERIAL

HIPS housing, PMMA light guide, glass bulbs.

### ENERGY LABEL

B

### INSTALLATION REQUIRED

Yes

### LIGHTSOURCE TYPE

LED

### LIGHTSOURCE INCLUDED

Yes

### NUMBER OF LIGHTSOURCES

96

### SHAPE

Disc

### INPUT VOLTAGE

110-240V

### FREQUENCY

50/60

### MAX POWER CONSUMPTION

41W

### LAMPHOLDER

LED (Solid state)

### LIFETIME

50000 hours

### CABLE COLOUR

Transparent with tinned cores

### CABLE LENGTH

400cm | 157.5"

### CANOPY

Pebble II White, ABS

### CRI

80

### LIGHT DIRECTION

All directions

### LIGHT OUTPUT

1936 lm

### DIMMING & LIGHTING CONTROL

Mains, Trailing edge, Reverse phase


*See last page for more information about the dimming possibilities.*



# Prop Light Suspended / Round Double Vertical

## Dimensions

73cm | 28.7"  
25cm | 9.8"



## Product

**WIDTH** 73cm | 28.7"  
**HEIGHT** 73cm | 28.7"  
**DEPTH** 25cm | 9.8"  
**DIAMETER** 0cm | 0"  
**WEIGHT NETTO** 15kg | 33.07lbs

## Packaging

**WIDTH** 88cm | 34.6"  
**HEIGHT** 34cm | 13.4"  
**CUBAGE** 0.27m<sup>3</sup> | 9.4ft<sup>3</sup>  
**LENGTH** 89cm | 35"  
**WEIGHT** 15kg | 33.07lbs

## Technical CE

### ADDITIONAL

The Proplight is available in two colour temperatures: 2000K or 2700K.

### MATERIAL

HIPS housing, PMMA light guide, glass bulbs.

### ENERGY LABEL

B

### LIGHTSOURCE TYPE

LED

### NUMBER OF LIGHTSOURCES

96

### INPUT VOLTAGE

110-240V

### MAX POWER CONSUMPTION

21W

### LIFETIME

50000 hours

### CABLE LENGTH

400cm | 157.5"

### CRI

80

### LIGHT OUTPUT

1936 lm

### INSTALLATION REQUIRED

Yes

### LIGHTSOURCE INCLUDED

Yes

### SHAPE

Disc

### FREQUENCY

50/60

### LAMPHOLDER

LED (Solid state)

### CABLE COLOUR

Transparent with tinned cores

### CANOPY

Pebble II White, ABS

### LIGHT DIRECTION

All directions

### DIMMING & LIGHTING CONTROL

Mains, Trailing edge, Reverse phase

*See last page for more information about the dimming possibilities.*

---

*Technical UL***ADDITIONAL**

The Proplight is available in two colour temperatures: 2000K or 2700K.

**MATERIAL**

HIPS housing, PMMA light guide, glass bulbs.

**ENERGY LABEL**

B

**INSTALLATION REQUIRED**

Yes

**LIGHTSOURCE TYPE**

LED

**LIGHTSOURCE INCLUDED**

Yes

**NUMBER OF LIGHTSOURCES**

96

**SHAPE**

Disc

**INPUT VOLTAGE**

110-240V

**FREQUENCY**

50/60

**MAX POWER CONSUMPTION**

21W

**LAMPHOLDER**

LED (Solid state)

**LIFETIME**

50000 hours

**CABLE COLOUR**

Transparent with tinned cores

**CABLE LENGTH**

400cm | 157.5"

**CANOPY**

Pebble II White, ABS

**CRI**

80

**LIGHT DIRECTION**

All directions

**LIGHT OUTPUT**

1936 lm

**DIMMING & LIGHTING CONTROL**

Mains, Trailing edge, Reverse phase



*See last page for more information about the dimming possibilities.*



# Prop Light Suspended / Round Single

## Dimensions

73cm | 28.7"



## Product

**WIDTH** 73cm | 28.7"

**HEIGHT** 19cm | 7.5"

**DEPTH** 73cm | 28.7"

**DIAMETER** 73cm | 28.7"

**WEIGHT NETTO** 7kg | 15.43lbs

## Packaging

**WIDTH** 88cm | 34.6"

**HEIGHT** 34cm | 13.4"

**CUBAGE** 0.27m<sup>3</sup> | 9.4ft<sup>3</sup>

**LENGTH** 89cm | 35"

**WEIGHT** 15kg | 33.07lbs

## Technical CE

### ADDITIONAL

The Proplight is available in two colour temperatures: 2000K or 2700K.

### MATERIAL

HIPS housing, PMMA light guide, glass bulbs.

### ENERGY LABEL

B

### LIGHTSOURCE TYPE

LED

### NUMBER OF LIGHTSOURCES

48

### INPUT VOLTAGE

110-240V

### MAX POWER CONSUMPTION

21W

### LIFETIME

50000 hours

### CABLE LENGTH

400cm | 157.5"

### CRI

80

### LIGHT OUTPUT

1078 lm

### INSTALLATION REQUIRED

Yes

### LIGHTSOURCE INCLUDED

Yes

### SHAPE

Disc

### FREQUENCY

50/60

### LAMPHOLDER

LED (Solid state)

### CABLE COLOUR

Transparent with tinned cores

### CANOPY

Pebble II White, ABS

### LIGHT DIRECTION

All directions

### DIMMING & LIGHTING CONTROL

Mains, Trailing edge, Reverse phase

*See last page for more information about the dimming possibilities.*



---

## Technical UL

### ADDITIONAL

The Proplight is available in two colour temperatures: 2000K or 2700K.

### MATERIAL

HIPS housing, PMMA light guide, glass bulbs.

### ENERGY LABEL

B

### INSTALLATION REQUIRED

Yes

### LIGHTSOURCE TYPE

LED

### LIGHTSOURCE INCLUDED

Yes

### NUMBER OF LIGHTSOURCES

48

### SHAPE

Disc

### INPUT VOLTAGE

110-240V

### FREQUENCY

50/60

### MAX POWER CONSUMPTION

21W

### LAMPHOLDER

LED (Solid state)

### LIFETIME

50000 hours

### CABLE COLOUR

Transparent with tinned cores

### CABLE LENGTH

400cm | 157.5"

### CANOPY

Pebble II White, ABS

### CRI

80

### LIGHT DIRECTION

All directions

### LIGHT OUTPUT

1085 lm

### DIMMING & LIGHTING CONTROL

Mains, Trailing edge, Reverse phase

*See last page for more information about the dimming possibilities.*




# Prop Light Suspended / Single

## Dimensions

98cm | 38.6"



18cm | 7.1"



13cm | 5.1"

## Product

**WIDTH** 98cm | 38.6"

**HEIGHT** 13cm | 5.1"

**DEPTH** 18cm | 7.1"

**WEIGHT NETTO** 5kg | 11.02lbs

## Packaging

**WIDTH** 30cm | 11.8"

**HEIGHT** 30cm | 11.8"

**CUBAGE** 0.12m<sup>3</sup> | 4.23ft<sup>3</sup>

**LENGTH** 133cm | 52.4"

**WEIGHT** 10kg | 22.05lbs

## Technical CE

### ADDITIONAL

The Proplight is available in two colour temperatures: 2000K or 2700K.

### MATERIAL

HIPS housing, PMMA light guide, glass bulbs.

### ENERGY LABEL

A

### INSTALLATION REQUIRED

Yes

### LIGHTSOURCE TYPE

LED

### LIGHTSOURCE INCLUDED

Yes

### NUMBER OF LIGHTSOURCES

18

### SHAPE

Linear

### INPUT VOLTAGE

110-240V

### FREQUENCY

50/60

### MAX POWER CONSUMPTION

21W

### LAMPHOLDER

LED (Solid state)

### LIFETIME

50000 hours

### CABLE COLOUR

Transparent with tinned cores

### CABLE LENGTH

400cm | 157.5"

### CANOPY

Pebble II White, ABS

### CRI

80

### LIGHT DIRECTION

All directions

### LIGHT OUTPUT

499 lm

### DIMMING & LIGHTING CONTROL

Mains, Trailing edge, Reverse phase

*See last page for more information about the dimming possibilities.*



---

## Technical UL

### ADDITIONAL

The Proplight is available in two colour temperatures: 2000K or 2700K.

### MATERIAL

HIPS housing, PMMA light guide, glass bulbs.

### ENERGY LABEL

A

### INSTALLATION REQUIRED

Yes

### LIGHTSOURCE TYPE

LED

### LIGHTSOURCE INCLUDED

Yes

### NUMBER OF LIGHTSOURCES

18

### SHAPE

Linear

### INPUT VOLTAGE

110-240V

### FREQUENCY

50/60

### MAX POWER CONSUMPTION

21W

### LAMPHOLDER

LED (Solid state)

### LIFETIME

50000 hours

### CABLE COLOUR

Transparent with tinned cores

### CABLE LENGTH

400cm | 157.5"

### CANOPY

Pebble II White, ABS

### CRI

80

### LIGHT DIRECTION

All directions

### LIGHT OUTPUT

499 lm

### DIMMING & LIGHTING CONTROL

Mains, Trailing edge, Reverse phase

*See last page for more information about the dimming possibilities.*



## *Dimming & Lighting Control*

### *Mains, Trailing edge, Reverse phase*

The luminaire is dimmable by using an external Electronic Low Voltage dimmer. The dimmer is usually mounted on an existing wall socket and there is no need to change your home's wiring. On the dimmer it should show that it is a LED dimmer, suitable for 5 Watts or lower and C-type capable. Dimming is less fluent and can come with some flicker, a beep or a buzz.

Compatible models: Double CE, Double UL, Double Horizontal CE, Double Horizontal UL, Double Vertical CE, Double Vertical UL, Round Double CE, Round Double UL, Round Double Vertical CE, Round Double Vertical UL, Round Single CE, Round Single UL, Single CE, Single UL

---