

m o o o i

Prop Light Suspended

BERTJAN POT



"We have round lights, we have straight lights. We have them with lights on one side, we have them with lights on two sides. You can hang them high, low, horizontally, vertically or even hang them in an angle. Put them on the floor, hang them on your wall or down from the ceiling. We find it very hard to imagine an interior where this prop is not in place" - Bertjan Pot

Detailing



A theatrical, extravagant look that is suitable for spaces with both low and high ceilings.

Colours

2000K

Warm White


2700K

Soft White


Prop Light Suspended / Double

Dimensions

98cm | 38.6"



18cm | 7.1"



17cm | 6.7"

Product

WIDTH 98cm | 38.6"

HEIGHT 18cm | 7.1"

DEPTH 18cm | 7.1"

WEIGHT NETTO 6kg | 13.23lbs

Packaging

WIDTH 30cm | 11.8"

HEIGHT 30cm | 11.8"

CUBAGE 0.12m³ | 4.23ft³

LENGTH 133cm | 52.4"

WEIGHT 10kg | 22.05lbs

Technical CE

ADDITIONAL

The Proplight is available in two colour temperatures: 2000K or 2700K.

MATERIAL

HIPS housing, PMMA light guide, glass bulbs.

ENERGY LABEL

Energy Label A

LIGHTSOURCE TYPE

LED

NUMBER OF LIGHTSOURCES

36

INPUT VOLTAGE

110-240

MAX POWER CONSUMPTION

21W

LIFETIME

50000 hours

CABLE LENGTH

400cm | 157.5"

CRI

80

LIGHT OUTPUT

1600 lm

INSTALLATION REQUIRED

Yes

LIGHTSOURCE INCLUDED

Yes

SHAPE

Linear

FREQUENCY

50/60

LAMPHOLDER

LED (Solid state)

CABLE COLOUR

Transparent with tinned cores

CANOPY

Pebble II White, ABS

LIGHT DIRECTION

All directions

DIMMING & LIGHTING CONTROL

Mains, Trailing edge, Reverse phase

See last page for more information about the dimming possibilities.



Technical cULus

ADDITIONAL

The Proplight is available in two colour temperatures: 2000K or 2700K.

MATERIAL

HIPS housing, PMMA light guide, glass bulbs.

ENERGY LABEL

Energy Label A

LIGHTSOURCE TYPE

LED

NUMBER OF LIGHTSOURCES

36

INPUT VOLTAGE

110-240

MAX POWER CONSUMPTION

21W

LIFETIME

50000 hours

CABLE LENGTH

400cm | 157.5"

CRI

80

LIGHT OUTPUT

1600 lm

INSTALLATION REQUIRED

Yes

LIGHTSOURCE INCLUDED

Yes

SHAPE

Linear

FREQUENCY

50/60

LAMPHOLDER

LED (Solid state)

CABLE COLOUR

Transparent with tinned cores

CANOPY

Pebble II White, ABS

LIGHT DIRECTION

All directions

DIMMING & LIGHTING CONTROL

Mains, Trailing edge, Reverse phase


See last page for more information about the dimming possibilities.




Prop Light Suspended / Double Horizontal

Dimensions

98cm | 38.6"



17cm | 6.7"



18cm | 7.1"

Product

WIDTH 98cm | 38.6"

HEIGHT 18cm | 7.1"

DEPTH 17cm | 6.7"

WEIGHT NETTO 6kg | 13.23lbs

Packaging

WIDTH 30cm | 11.8"

HEIGHT 30cm | 11.8"

CUBAGE 0.12m³ | 4.23ft³

LENGTH 133cm | 52.4"

WEIGHT 10kg | 22.05lbs

Technical CE

ADDITIONAL

The Proplight is available in two colour temperatures: 2000K or 2700K.

MATERIAL

HIPS housing, PMMA light guide, glass bulbs.

ENERGY LABEL

Energy Label A

LIGHTSOURCE TYPE

LED

NUMBER OF LIGHTSOURCES

36

INPUT VOLTAGE

110-240

MAX POWER CONSUMPTION

21W

LIFETIME

50000 hours

CABLE LENGTH

400cm | 157.5"

CRI

80

LIGHT OUTPUT

1600 lm

INSTALLATION REQUIRED

Yes

LIGHTSOURCE INCLUDED

Yes

SHAPE

Linear

FREQUENCY

50/60

LAMPHOLDER

LED (Solid state)

CABLE COLOUR

Transparent with tinned cores

CANOPY

Pebble II White, ABS

LIGHT DIRECTION

All directions

DIMMING & LIGHTING CONTROL

Mains, Trailing edge, Reverse phase

See last page for more information about the dimming possibilities.



Technical cULus

ADDITIONAL

The Proplight is available in two colour temperatures: 2000K or 2700K.

MATERIAL

HIPS housing, PMMA light guide, glass bulbs.

ENERGY LABEL

Energy Label A

LIGHTSOURCE TYPE

LED

NUMBER OF LIGHTSOURCES

36

INPUT VOLTAGE

110-240

MAX POWER CONSUMPTION

21W

LIFETIME

50000 hours

CABLE LENGTH

400cm | 157.5"

CRI

80

LIGHT OUTPUT

1600 lm

INSTALLATION REQUIRED

Yes

LIGHTSOURCE INCLUDED

Yes

SHAPE

Linear

FREQUENCY

50/60

LAMPHOLDER

LED (Solid state)

CABLE COLOUR

Transparent with tinned cores

CANOPY

Pebble II White, ABS

LIGHT DIRECTION

All directions

DIMMING & LIGHTING CONTROL


Mains, Trailing edge, Reverse phase

See last page for more information about the dimming possibilities.



Prop Light Suspended / Double Vertical

Dimensions

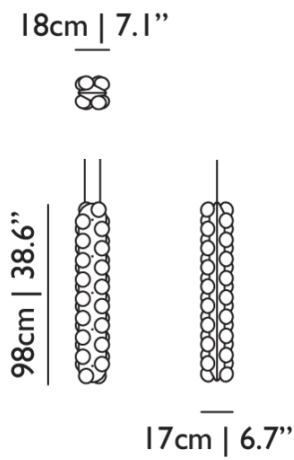

Product

WIDTH 17cm | 6.7"
HEIGHT 98cm | 38.6"
DEPTH 18cm | 7.1"
WEIGHT NETTO 6kg | 13.23lbs

Packaging

WIDTH 30cm | 11.8"
HEIGHT 30cm | 11.8"
CUBAGE 0.12m³ | 4.23ft³
LENGTH 133cm | 52.4"
WEIGHT 10kg | 22.05lbs

Technical CE

ADDITIONAL

The Proplight is available in two colour temperatures: 2000K or 2700K.

MATERIAL

HIPS housing, PMMA light guide, glass bulbs.

ENERGY LABEL

Energy Label A

LIGHTSOURCE TYPE

LED

NUMBER OF LIGHTSOURCES

36

INPUT VOLTAGE

110-240

MAX POWER CONSUMPTION

21W

LIFETIME

50000 hours

CABLE LENGTH

400cm | 157.5"; 1000cm | 393.7"

CRI

80

LIGHT OUTPUT

1600 lm

INSTALLATION REQUIRED

Yes

LIGHTSOURCE INCLUDED

Yes

SHAPE

Linear

FREQUENCY

50/60

LAMPHOLDER

LED (Solid state)

CABLE COLOUR

Transparent with tinned cores

CANOPY

Pebble II White, ABS

LIGHT DIRECTION

All directions

DIMMING & LIGHTING CONTROL

Mains, Trailing edge, Reverse phase

See last page for more information about the dimming possibilities.



Technical cULus

ADDITIONAL

The Proplight is available in two colour temperatures: 2000K or 2700K.

MATERIAL

HIPS housing, PMMA light guide, glass bulbs.

ENERGY LABEL

Energy Label A

LIGHTSOURCE TYPE

LED

NUMBER OF LIGHTSOURCES

36

INPUT VOLTAGE

110-240

MAX POWER CONSUMPTION

21W

LIFETIME

50000 hours

CABLE LENGTH

400cm | 157.5"

CRI

80

LIGHT OUTPUT

1600 lm

INSTALLATION REQUIRED

Yes

LIGHTSOURCE INCLUDED

Yes

SHAPE

Linear

FREQUENCY

50/60

LAMPHOLDER

LED (Solid state)

CABLE COLOUR

Transparent with tinned cores

CANOPY

Pebble II White, ABS

LIGHT DIRECTION

All directions

DIMMING & LIGHTING CONTROL

Mains, Trailing edge, Reverse phase



See last page for more information about the dimming possibilities.



Prop Light Suspended / Round Double

Dimensions

73cm | 28.7"



Product

WIDTH 73cm | 28.7"

HEIGHT 25cm | 9.8"

DEPTH 73cm | 28.7"

DIAMETER 73cm | 28.7"

WEIGHT NETTO 9kg | 19.84lbs

Packaging

WIDTH 88cm | 34.6"

HEIGHT 34cm | 13.4"

CUBAGE 0.27m³ | 9.4ft³

LENGTH 89cm | 35"

WEIGHT 15kg | 33.07lbs

Technical CE

ADDITIONAL

The Proplight is available in two colour temperatures: 2000K or 2700K.

MATERIAL

HIPS housing, PMMA light guide, glass bulbs.

ENERGY LABEL

Energy Label B

LIGHTSOURCE TYPE

LED

NUMBER OF LIGHTSOURCES

96

INPUT VOLTAGE

110-240

MAX POWER CONSUMPTION

41W

LIFETIME

50000 hours

CABLE LENGTH

400cm | 157.5"

CRI

80

LIGHT OUTPUT

1936 lm

INSTALLATION REQUIRED

Yes

LIGHTSOURCE INCLUDED

Yes

SHAPE

Disc

FREQUENCY

50/60

LAMPHOLDER

LED (Solid state)

CABLE COLOUR

Transparent with tinned cores

CANOPY

Pebble II White, ABS

LIGHT DIRECTION

All directions

DIMMING & LIGHTING CONTROL

Mains, Trailing edge, Reverse phase

See last page for more information about the dimming possibilities.



Technical cULus

ADDITIONAL

The Proplight is available in two colour temperatures: 2000K or 2700K.

MATERIAL

HIPS housing, PMMA light guide, glass bulbs.

ENERGY LABEL

Energy Label B

LIGHTSOURCE TYPE

LED

NUMBER OF LIGHTSOURCES

96

INPUT VOLTAGE

110-240

MAX POWER CONSUMPTION

41W

LIFETIME

50000 hours

CABLE LENGTH

400cm | 157.5"

CRI

80

LIGHT OUTPUT

1936 lm

INSTALLATION REQUIRED

Yes

LIGHTSOURCE INCLUDED

Yes

SHAPE

Disc

FREQUENCY

50/60

LAMPHOLDER

LED (Solid state)

CABLE COLOUR

Transparent with tinned cores

CANOPY

Pebble II White, ABS

LIGHT DIRECTION

All directions

DIMMING & LIGHTING CONTROL

Mains, Trailing edge, Reverse phase



See last page for more information about the dimming possibilities.



Prop Light Suspended / Round Double Vertical

Dimensions

73cm | 28.7"
25cm | 9.8"



25cm | 9.8"

Product

WIDTH 73cm | 28.7"
HEIGHT 73cm | 28.7"
DEPTH 25cm | 9.8"
DIAMETER 0cm | 0"
WEIGHT NETTO 15kg | 33.07lbs

Packaging

WIDTH 88cm | 34.6"
HEIGHT 34cm | 13.4"
CUBAGE 0.27m³ | 9.4ft³
LENGTH 89cm | 35"
WEIGHT 15kg | 33.07lbs

Technical CE

ADDITIONAL

The Proplight is available in two colour temperatures: 2000K or 2700K.

MATERIAL

HIPS housing, PMMA light guide, glass bulbs.

ENERGY LABEL

Energy Label B

LIGHTSOURCE TYPE

LED

NUMBER OF LIGHTSOURCES

96

INPUT VOLTAGE

110-240

MAX POWER CONSUMPTION

21W

LIFETIME

50000 hours

CABLE LENGTH

400cm | 157.5"

CRI

80

LIGHT OUTPUT

1936 lm

INSTALLATION REQUIRED

Yes

LIGHTSOURCE INCLUDED

Yes

SHAPE

Disc

FREQUENCY

50/60

LAMPHOLDER

LED (Solid state)

CABLE COLOUR

Transparent with tinned cores

CANOPY

Pebble II White, ABS

LIGHT DIRECTION

All directions

DIMMING & LIGHTING CONTROL

Mains, Trailing edge, Reverse phase

See last page for more information about the dimming possibilities.



Technical cULus

ADDITIONAL

The Proplight is available in two colour temperatures: 2000K or 2700K.

MATERIAL

HIPS housing, PMMA light guide, glass bulbs.

ENERGY LABEL

Energy Label B

LIGHTSOURCE TYPE

LED

NUMBER OF LIGHTSOURCES

96

INPUT VOLTAGE

110-240

MAX POWER CONSUMPTION

21W

LIFETIME

50000 hours

CABLE LENGTH

400cm | 157.5"

CRI

80

LIGHT OUTPUT

1936 lm

INSTALLATION REQUIRED

Yes

LIGHTSOURCE INCLUDED

Yes

SHAPE

Disc

FREQUENCY

50/60

LAMPHOLDER

LED (Solid state)

CABLE COLOUR

Transparent with tinned cores

CANOPY

Pebble II White, ABS

LIGHT DIRECTION

All directions

DIMMING & LIGHTING CONTROL

Mains, Trailing edge, Reverse phase



See last page for more information about the dimming possibilities.



Prop Light Suspended / Round Single

Dimensions

73cm | 28.7"



Product

WIDTH 73cm | 28.7"

HEIGHT 19cm | 7.5"

DEPTH 73cm | 28.7"

DIAMETER 73cm | 28.7"

WEIGHT NETTO 7kg | 15.43lbs

Packaging

WIDTH 88cm | 34.6"

HEIGHT 34cm | 13.4"

CUBAGE 0.27m³ | 9.4ft³

LENGTH 89cm | 35"

WEIGHT 15kg | 33.07lbs

Technical CE

ADDITIONAL

The Proplight is available in two colour temperatures: 2000K or 2700K.

MATERIAL

HIPS housing, PMMA light guide, glass bulbs.

ENERGY LABEL

Energy Label B

LIGHTSOURCE TYPE

LED

NUMBER OF LIGHTSOURCES

48

INPUT VOLTAGE

110-240

MAX POWER CONSUMPTION

21W

LIFETIME

50000 hours

CABLE LENGTH

400cm | 157.5"

CRI

80

LIGHT OUTPUT

1078 lm

INSTALLATION REQUIRED

Yes

LIGHTSOURCE INCLUDED

Yes

SHAPE

Disc

FREQUENCY

50/60

LAMPHOLDER

LED (Solid state)

CABLE COLOUR

Transparent with tinned cores

CANOPY

Pebble II White, ABS

LIGHT DIRECTION

All directions

DIMMING & LIGHTING CONTROL

Mains, Trailing edge, Reverse phase

See last page for more information about the dimming possibilities.



Technical cULus

ADDITIONAL

The Proplight is available in two colour temperatures: 2000K or 2700K.

MATERIAL

HIPS housing, PMMA light guide, glass bulbs.

ENERGY LABEL

Energy Label B

LIGHTSOURCE TYPE

LED

NUMBER OF LIGHTSOURCES

48

INPUT VOLTAGE

110-240

MAX POWER CONSUMPTION

21W

LIFETIME

50000 hours

CABLE LENGTH

400cm | 157.5"

CRI

80

LIGHT OUTPUT

1085 lm

INSTALLATION REQUIRED

Yes

LIGHTSOURCE INCLUDED

Yes

SHAPE

Disc

FREQUENCY

50/60

LAMPHOLDER

LED (Solid state)

CABLE COLOUR

Transparent with tinned cores

CANOPY

Pebble II White, ABS

LIGHT DIRECTION

All directions

DIMMING & LIGHTING CONTROL

Mains, Trailing edge, Reverse phase

See last page for more information about the dimming possibilities.




Prop Light Suspended / Single

Dimensions

98cm | 38.6"



18cm | 7.1"



13cm | 5.1"

Product

WIDTH 98cm | 38.6"

HEIGHT 13cm | 5.1"

DEPTH 18cm | 7.1"

WEIGHT NETTO 5kg | 11.02lbs

Packaging

WIDTH 30cm | 11.8"

HEIGHT 30cm | 11.8"

CUBAGE 0.12m³ | 4.23ft³

LENGTH 133cm | 52.4"

WEIGHT 10kg | 22.05lbs

Technical CE

ADDITIONAL

The Proplight is available in two colour temperatures: 2000K or 2700K.

MATERIAL

HIPS housing, PMMA light guide, glass bulbs.

ENERGY LABEL

Energy Label A

LIGHTSOURCE TYPE

LED

NUMBER OF LIGHTSOURCES

18

INPUT VOLTAGE

110-240

MAX POWER CONSUMPTION

21W

LIFETIME

50000 hours

CABLE LENGTH

400cm | 157.5"

CRI

80

LIGHT OUTPUT

499 lm

INSTALLATION REQUIRED

Yes

LIGHTSOURCE INCLUDED

Yes

SHAPE

Linear

FREQUENCY

50/60

LAMPHOLDER

LED (Solid state)

CABLE COLOUR

Transparent with tinned cores

CANOPY

Pebble II White, ABS

LIGHT DIRECTION

All directions

DIMMING & LIGHTING CONTROL

Mains, Trailing edge, Reverse phase

See last page for more information about the dimming possibilities.



Technical cULus

ADDITIONAL

The Proplight is available in two colour temperatures: 2000K or 2700K.

MATERIAL

HIPS housing, PMMA light guide, glass bulbs.

ENERGY LABEL

Energy Label A

LIGHTSOURCE TYPE

LED

NUMBER OF LIGHTSOURCES

18

INPUT VOLTAGE

110-240

MAX POWER CONSUMPTION

21W

LIFETIME

50000 hours

CABLE LENGTH

400cm | 157.5"

CRI

80

LIGHT OUTPUT

499 lm

INSTALLATION REQUIRED

Yes

LIGHTSOURCE INCLUDED

Yes

SHAPE

Linear

FREQUENCY

50/60

LAMPHOLDER

LED (Solid state)

CABLE COLOUR

Transparent with tinned cores

CANOPY

Pebble II White, ABS

LIGHT DIRECTION

All directions

DIMMING & LIGHTING CONTROL

Mains, Trailing edge, Reverse phase

See last page for more information about the dimming possibilities.



Dimming & Lighting Control

Mains, Trailing edge, Reverse phase

The luminaire is dimmable by using an external Electronic Low Voltage dimmer. The dimmer is usually mounted on an existing wall socket and there is no need to change your home's wiring. On the dimmer it should show that it is a LED dimmer, suitable for 5 Watts or lower and C-type capable. Dimming is less fluent and can come with some flicker, a beep or a buzz.

Compatible models: Double CE, Double cULus, Double Horizontal CE, Double Horizontal cULus, Double Vertical CE, Double Vertical cULus, Round Double CE, Round Double cULus, Round Double Vertical CE, Round Double Vertical cULus, Round Single CE, Round Single cULus, Single CE, Single cULus
